

WaterLink® **SpinTouchFX** 

**The Ultimate Fresh & Salt Water Analyser
For Aquariums and Ponds.**



Up to 8 Tests in 2 Minutes!

Ready to go anywhere!

 **LaMotte**

WaterLink® SpinTouch®FX

Every now and then a technology emerges that changes people's lives. For people who test water, that time is now.


Available Tests:

Alkalinity
Ammonia
Hardness
Magnesium
Calcium
Nitrate
Nitrite
pH
Phosphate

Up to 8 tests in 2 minutes

- Reliable Results
- Super Fast & Simple
- Auto-Record Keeping
- Rugged and Portable

The innovative **WaterLink® Spin Touch® FX** photometer does all your water testing for you. Each sealed reagent disk contains the precise amount of reagent needed to run a complete series of tests. Just fill one unique Spin reagent disk with less than 3 mL of water and all your vital tests are done automatically—in just 2 minutes! It's the most advanced system for wet chemistry methods ever produced. Now analysts can achieve test results without time consuming test and clean-up procedures. This ground-breaking analysis system is so simple anyone can use it! No vials to fill, no prep time, no guessing!

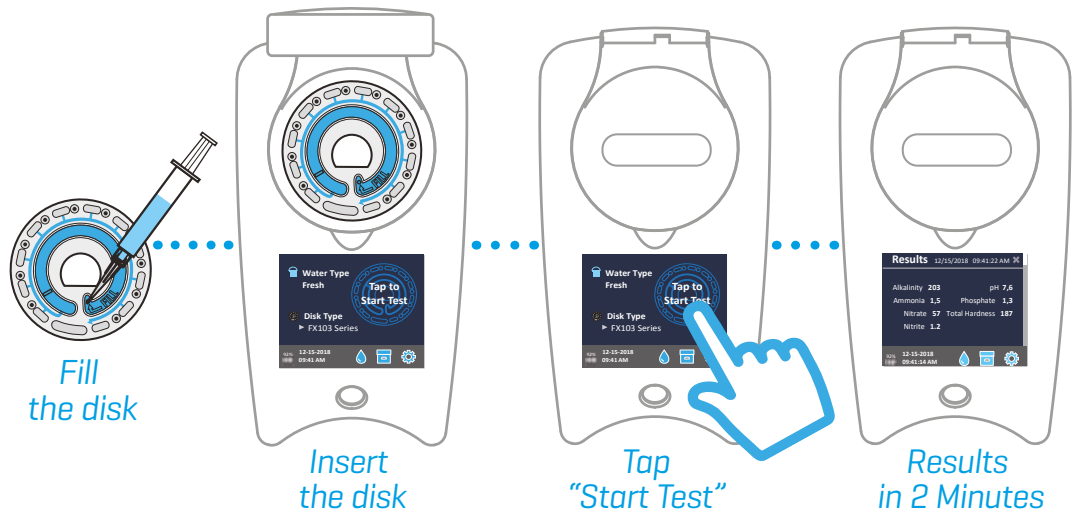


So Simple! So Fast!

Proven analytical chemistry has combined with **Centrifugal Fluidics Photometry** to create the breakthrough **WaterLink® Spin Touch®**



Centrifugal Fluidics Photometry™

The Device *Precise analysis of up to 8 parameters in 2 minutes!*

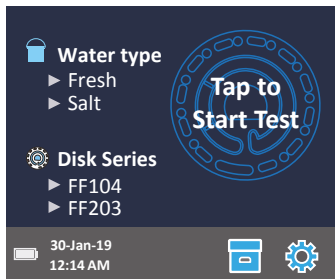

Reliable Results

- Virtually Eliminates User-Error
- Pre-Measured Reagents
- Exact Reaction Time and Auto-Blanking
- Meter Calibration Check System
- 6-Wavelength Photometer

Super Fast & Simple

- 2 Minutes for up to 7 Complete Tests Using One Disk
- Fill Disk and Insert > Tap "Start Test" > Read Results

Data Logging

- Stores Test Dates, Times, Results, and Location
- Download via USB to PC

Rugged and Portable

- Innovative Water-Resistant Housing
- Internal, Rechargeable Batteries

Bluetooth® is a registered trademark of Bluetooth® SIG, Inc.

| | |
|-------------------|---|
| Instrument Type: | Centrifugal Fluidics Photometer |
| 6 Wavelengths: | 390 nm, 428 nm, 470 nm, 525 nm, 568 nm, 635 nm |
| Display: | Color Capacitive Touchscreen, 3.5", 320 X 240 pixel resolution |
| Languages | English, French, Spanish, German, Italian, Portuguese, Dutch, Swedish, Turkish, Chinese |
| Batteries: | Lithium Ion, Rechargeable (Full Charge in 10-12 hours), 150 tests per charge |
| Communication: | Bluetooth, USB-C |
| Calibration: | Factory Set, Field Calibration via Internet Connection |
| Data Storage: | Last 250 Test Results with Date, Time, Location |
| Water Resistance: | Rubber Co-molded Base, Rubber USB Port Plug, Gasketed Display & Hinge |
| Size & Weight: | 22.6 L x 12.7 W x 11.4 H cm; 0.79 kg; 8.5 L x 4.9 W x 4.1 H inches; 1.74 lb |
| Operation: | Single On/Off/Reset Button with Indicator Light, Touchscreen |
| Firmware: | Internet updateable [New Test, New Test Calibrations, etc.], requires USB connection to Windows® PC |
| Certification | CE |

The Complete Lab

WaterLink® Spin Touch® FX Order Code 3589

Includes: Photometer, Instruction Manual, Quick-Start Instructions, 3 Syringes, Meter Check Disk, Disk Cover, Sample Bottle, USB Cable with AC Adapter, Carrying Case [Disks sold separately]



The Reagent Cartridge Disks

Disks come individually packaged in foil pouches in boxed packs of 50.




Freshwater FX104 [Code 4353-H] | 50/box

| Test Factor | Display Abbreviation | Range | Accuracy | Method Detection Limit |
|-------------|----------------------|-----------------------|--|------------------------|
| Alkalinity | ALK/D ALK | 0 - 250 ppm/14.0 dKH | ± 15% | 15 ppm/0.8 dKH |
| Ammonia | AMMO | 0.0 - 3.0 ppm | < 2.0 ppm: ± 0.2 ppm > 2.0 ppm: ± 0.4 ppm | 0.2 ppm |
| Hardness | G HARD/D HARD | 0 - 500 ppm/ 28.0 dGH | ± 15% | 20 ppm/1.1 dGH |
| Nitrate | NITRATE | 0 - 100 ppm | ± 30% | 5 ppm |
| Nitrite | NITRITE | 0.0 - 2.0 ppm | ± 0.2 ppm | 0.1 ppm |
| pH | pH | 4.5 - 10.0 | ± 0.2 | NA |
| Phosphate | PHOS | 0.0 - 2.0 ppm | ± 0.2 ppm | 0.2 ppm |

Saltwater FX203 [Code 4354-H] | 50/box

| Test Factor | Display Abbreviation | Range | Accuracy | Method Detection Limit |
|-------------|----------------------|----------------------|--|------------------------|
| Alkalinity | ALK/ALK D | 0 - 300 ppm/17.0 dKH | ± 15% | 15 ppm/0.9 dKH |
| Ammonia | AMMO | 0.0 - 3.0 ppm | < 1.0 ppm: ± 0.2 ppm > 1.0 ppm: ± 0.4 ppm | 0.2 ppm |
| Calcium | Ca | 200 - 800 ppm | ± 15% | NA |
| Magnesium | Mg | 500 - 2200 ppm | ± 15% | NA |
| Nitrate | NITRATE | 0 - 60 ppm | ± 25% | 5 ppm |
| Nitrite | NITRITE | 0.0 - 2.0 ppm | ± 0.2 ppm | 0.1 ppm |
| pH | pH | 6.5 - 10.0 | ± 0.2 | NA |
| Phosphate | PHOS | 0.0 - 2.0 ppm | ± 0.2 ppm | 0.2 ppm |

Disk Patent No. 8,734,734; FCI Patent No. 8,987,000; TCI Patent No. 8,993,337; FCI EU Patent No. EP2784503 A1

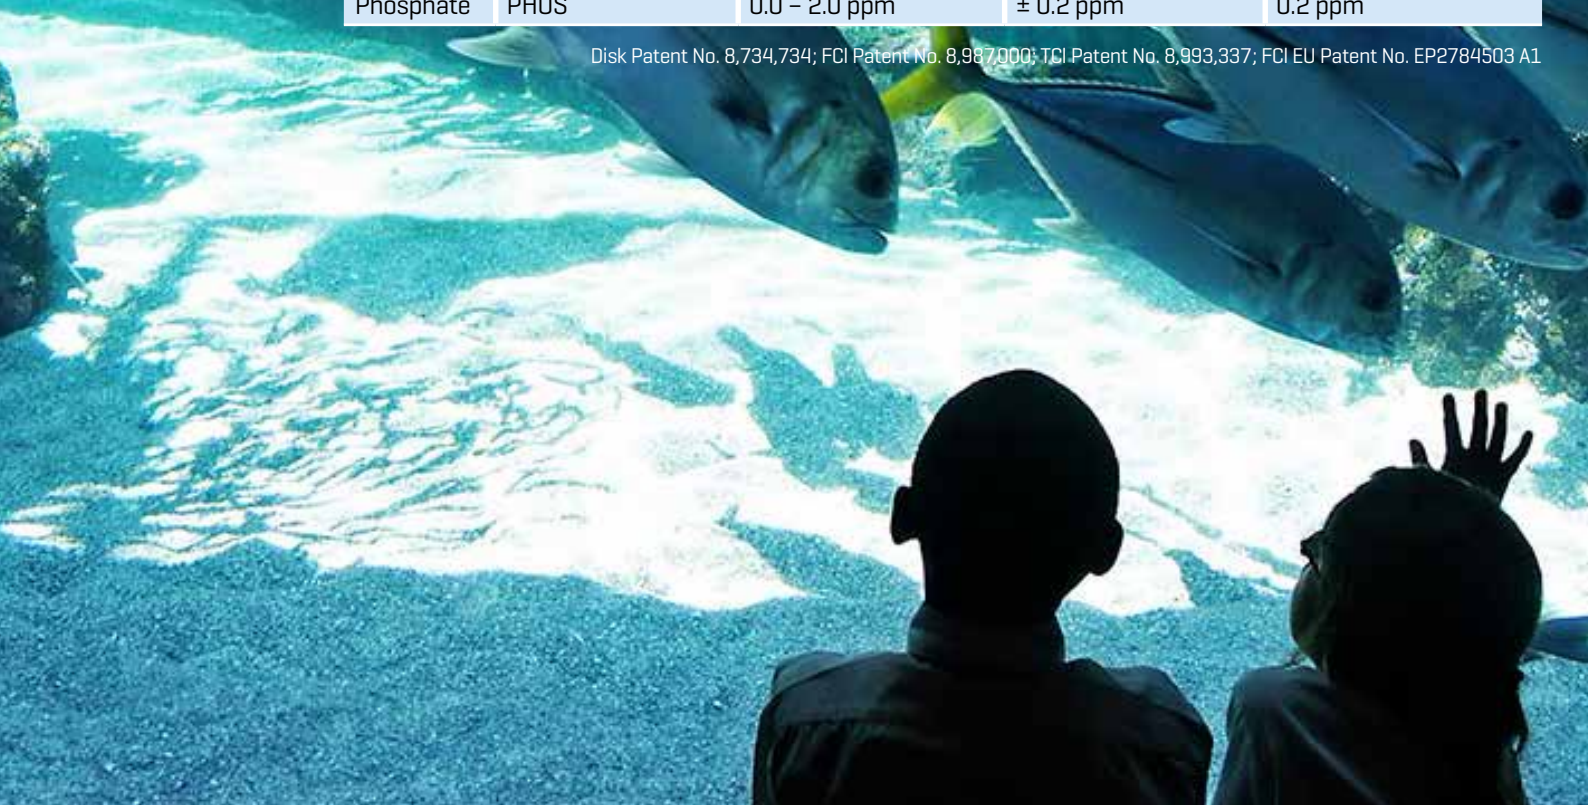

Tel: +44 (0) 1926 498203 | Email: sales@lamotte-europe.com
 Unit 1A Harris Road | Wedgnock Industrial Estate | Warwick | CV34 5JU
waterlinkspintouch.com | lamotte-europe.com

2024 LaMotte Europe Ltd. LaMotte Europe WaterLink Spin Touch FX, Aquarium and Pond, AC. 7.5.2024