



HOBO[®] U23-003 Data Logger

2x External Temperature

The HOBO Pro v2 2x External Temperature Data Logger is a weatherproof data logger with two external soil/water temperature probes on 6-foot cables for fast sensor response and deployment in tight spaces.




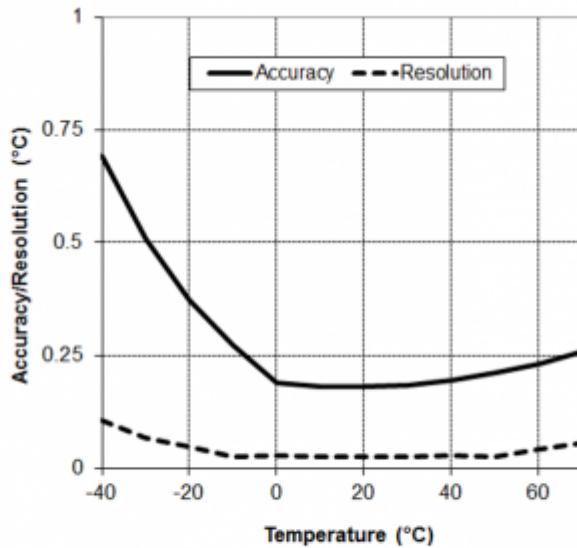
Key Advantages:

- Weatherproof housing for use in outdoor or condensing environments
- High accuracy
- Small-diameter external sensor versions for measurements in tight spaces
- Optic USB interface for fast and reliable download
- Compatible with HOBOWare and HOBOWare Pro software for logger setup, graphing and analysis

HOBO U23-003 Data Logger Specifications

| | |
|---|--|
| Temperature Sensor | |
| Operation Range | U23-001A internal sensor: -40 to 70°C (-40 to 158°F) U23-002A external temperature sensor: -40 to 70°C (-40 to 158°F) U23-003 and U23-004 external sensors: -40 to 100°C (-40 to 212°F), with tip and cable immersion in fresh water up to 50°C (122°F) for one year |
| Accuracy | U23-001A and U23-002A: ±0.25°C from -40 to 0°C (±0.45 from -40 to 32°F), ±0.2°C from 0 to 70°C (±0.36 from 32 to 158°F) U23-003 and U23-004: ±0.21°C from 0° to 50°C (±0.38°F from 32° to 122°F); see Plot A |
| Resolution | U23-001A and U23-002A: 0.04°C (0.072°F) U23-003 and U23-004: 0.02°C at 25°C (0.04°F at 77°F); see Plot A |
| Response Time (Typical to 90%) | U23-001A internal sensor: 10 minutes in air moving 1 m/sec U23-002A external temperature sensor: 3 minutes, 45 seconds in air moving 1 m/sec U23-003 and U23-004 external sensors: 3 minutes in air moving 1 m/sec; 30 seconds in stirred water |
| Drift | U23-001A and U23-002A: <0.01°C (0.018°F) per year U23-003 and U23-004: <0.1°C (0.18°F) per year |
| Relative Humidity Sensor (U23-001A, U23-002A only) | |
| Operation Range | 0 to 100% RH, -40° to 70°C (-40° to 158°F) Exposure to conditions below -20°C (-4°F) or above 95% RH may temporarily increase the maximum RH sensor error by an additional 1% |
| Accuracy | ±2.5% from 10% to 90% RH typical to a maximum of ±3.5% including hysteresis at 25°C (77°F); below 10% and above 90% ±5% typical |
| Resolution | 0.05% |
| Response Time (Typical to 90%) | U23-001A: 40 minutes in air moving 1 m/sec with protective cap U23-002A: 15 seconds in air moving 1 m/sec |
| Drift | <1% per year typical |
| Logger | |
| Operation Range | -40° to 70°C (-40° to 158°F) |
| Real-time Clock | ±1 minute per month 0° to 50°C (32° to 122°F) |
| Battery | 1/2 AA, 3.6 Volt lithium, user-replaceable (HP-B) |
| Battery Life (Typical Use) | 3 years with 1 minute or greater logging interval |
| Memory (Non-Volatile) | 64K bytes memory (approx. 21,000 temperature and RH measurements) |
| Materials | All models: ASA styrene polymer housing and mounting clamp; polypropylene protective cap; Buna-N o-ring(s); U23-001A, U23-002A only: ASA styrene polymer RH sensor cap; modified hydrophobic polyethersulfone membrane |
| Cables | U23-001A: No cables U23-002A: One 184 cm (6 ft) PVC cable; sensor diameter 1 cm (0.38 in.) U23-003: Two 184 cm (6 ft) PVC cables; sensor diameter 0.5 cm (0.20 in.) U23-004: One 184 cm (6 ft) PVC cable; sensor diameter 0.5 cm (0.20 in.) |
| Environmental Rating | Electronics housing is NEMA 6P equivalent (tolerant of brief submergence); Units with RH sensors are NEMA 4 equivalent (splash-resistant) |
| Launch Modes | Immediate start; delayed start |
| Logging Interval | Fixed-rate or multiple logging intervals, with up to 8 user-defined logging intervals and durations; logging intervals from 1 second to 18 hours |
| Offload Modes | Offload while logging; stop and offload |

| | |
|--|---|
| Battery Indication | Battery voltage can be viewed in status screen and optionally logged in datafile. Low battery indication in datafile. |
| Weight | U23-001A: 57 g (1.5 oz); U23-002A: 118 g (3.1 oz); U23-003: 138 g (3.7 oz); U23-004: 102 g (2.7 oz) |
| Dimensions | Housing measures 10.2 x 3.8 cm (4.0 x 1.5 in.) |
| NIST Certificate | Temperature certificate available for additional charge |
|  | The CE Marking identifies this product as complying with all relevant directives in the European Union (EU). |



Plot A
(applies to U23-003 and U23-004 models only)

Contact Us

Sales (8am to 5pm ET, Monday through Friday)

- ▶ Email sales@onsetcomp.com
- ▶ Call 1-508-759-9500
- ▶ In U.S. toll free 1-800-564-4377
- ▶ Fax 1-508-759-9100

Technical Support (8am to 6pm ET, Monday through Friday)

- ▶ Contact Product Support www.onsetcomp.com/support/contact
- ▶ Call 1-508-759-9500
- ▶ In U.S. toll free 1-877-564-4377

Onset Computer Corporation
 470 MacArthur Boulevard
 Bourne, MA 02532